



MANUFACTURERS
"AFC" LOGO
.025 MAX
RAISED OR INDENTED



"X" ALLOY STEEL
GRADE MARK

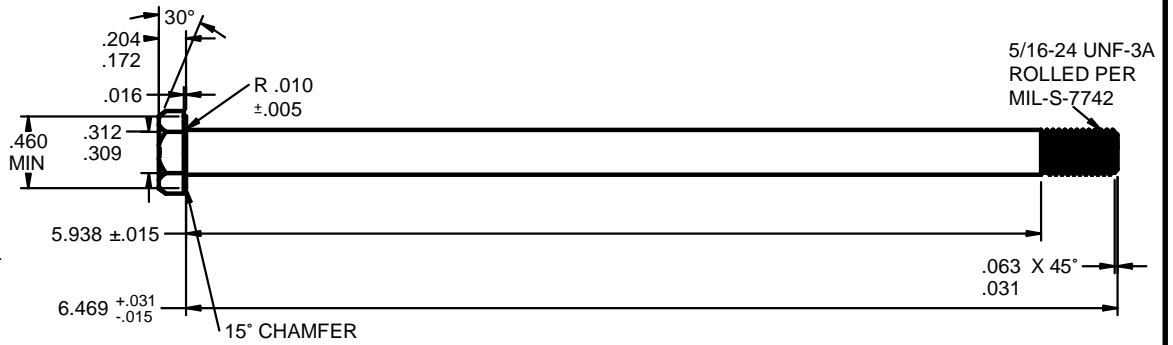

SCALE: 0.75X

DESIGN NOTES: AN5-63A AIRFRAME BOLT

1. LENGTH 6-15/32" (6.469"), GRIP 5-15/16" (5.938"), THREAD 5/16-24 UNF-3A.
2. PROCUREMENT SPECIFICATION NASM6812.
3. MATERIAL ALLOY STEEL PER PROCUREMENT SPECIFICATION.
UNS G40370 AMS6300 DFAR EXEMPT
UNS G87400 AMS6322 DFAR APPLIES
UNS G41400 AMS6382 DFAR APPLIES
UNS G41300 AMS-S-6758 DFAR APPLIES
4. HEAT TREAT AMS-2759 HRC 26-32.
5. FINISH CADMIUM PLATED PER AMS-QQ-P-416, TYPE 2 (YELLOW), CLASS 2.
6. THREADS 5/16-24 UNF-3A ROLLED PROCESS PER MIL-S-7742.
7. TENSILE 6,500 LBS. [28,913 N] MIN.
8. YIELD 4,980 LBS. [22,152 N] MIN.
9. SINGLE SHEAR 5,750 LBS. [25,577 N] MIN. SHORT LENGTH N/A.



ACTUAL SIZE

EXAMPLE PART NUMBER

AFC 5-63 C2 CADMIUM TYPE 2 YELLOW PLATING
AFC 5-63 C1 CADMIUM TYPE 1 PLAIN WHITE PLATING
AFC 5-63 TDC THERMAL DIFFUSION COATED ASTM A1059

↑ FINISH
↑ LENGTH 6.469"
↑ BODY SIZE & THREAD .312-24 UNF-3A
↑ MANUFACTURER AIRFASCO

UNCONTROLLED

CONFORMS TO: NASM3 THRU NASM20
PART NUMBER: AN5-63A

DIMENSIONS ARE IN INCHES AND TOLERANCES ARE AS SHOWN BELOW, DIMENSIONAL TOLERANCES AND SYMBOLS PER ANSI Y14.5M-1982	PROPRIETARY PARTS SHOWN IN THIS DRAWING ARE THE SUBJECT OF ISSUED UNITED STATES AND FOREIGN PATENTS AND PATENTS PENDING. UNAUTHORIZED REPRODUCTION AND/OR DISTRIBUTION OF THIS DRAWING IS STRICTLY PROHIBITED.			AIRFASCO.com	
	APPROVALS			DATE	
ANGLES ±5°	DRAWN C.D.	6/10/13		PART NUMBER: AN5-63A_AFC5-63C2	
.XX ±.03"	CHECKED T.W.	6/10/13		SIZE A	MATERIAL: 4037 / 8740 OR AS NOTED
.XXX ±.010"	ENG APPR B.E.	6/10/13		EST. WEIGHT: .148 / EACH LBS. [67.2 g]	
.XXXX ±.001"	MGR APPR D.D.	6/10/13		SCALE: 0.75X	DRAWING NUMBER: AN5-63A_AFC5-63C2
					SHEET 1 OF 1