


MANUFACTURERS

"AFC" LOGO

.025 MAX

RAISED OR INDENTED

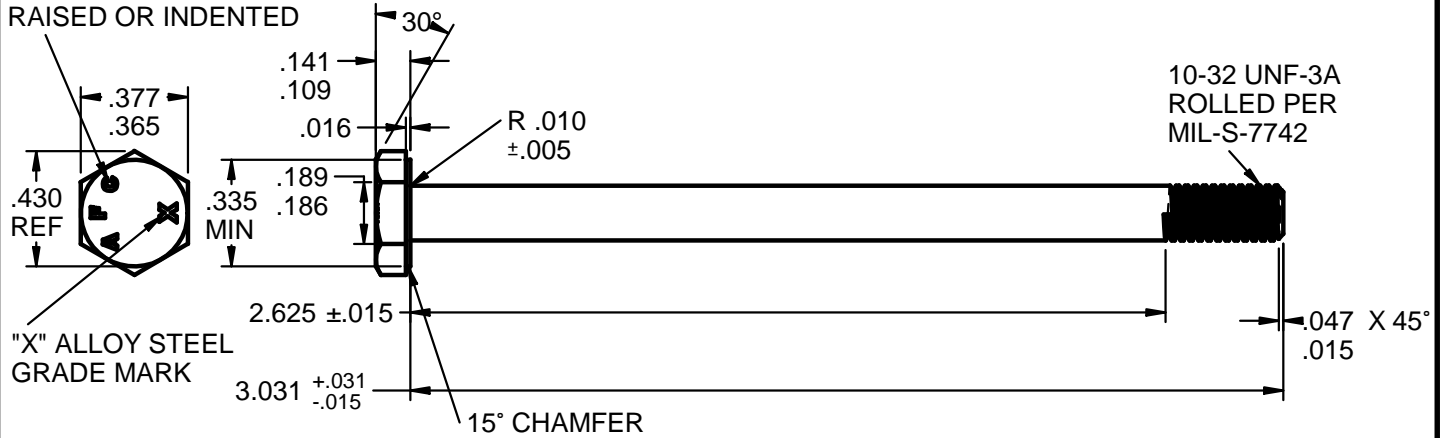

SCALE: 1.5X

DESIGN NOTES: AN3-30A AIRFRAME BOLT

1. LENGTH 3-1/32" (3.031"), GRIP 2-5/8" (2.625"), THREAD 10-32 UNF-3A.
2. PROCUREMENT SPECIFICATION NASM6812.
3. PREFERRED MATERIAL ALLOY STEEL PER PROCUREMENT SPECIFICATION.
 UNS G40370 AMS6300 DFAR EXEMPT
 UNS G87400 AMS6322 DFAR APPLIES
 UNS G41400 AMS6382 DFAR APPLIES
 UNS G41300 AMS-S-6758 DFAR APPLIES
4. HEAT TREAT AMS-2759 HRC 26-32.
5. FINISH CADMIUM PLATED PER AMS-QQ-P-416, TYPE 2 (YELLOW), CLASS 2.
6. THREADS 10-32 UNF-3A ROLLED PROCESS PER MIL-S-7742.
7. TENSILE 2,210 LBS. [9,830 N] MIN.
8. YIELD 1,690 LBS. [7,517 N] MIN.
9. SINGLE SHEAR 2,125 LBS. [9,415 N] MIN. SHORT LENGTH N/A.

EXAMPLE PART NUMBER

AFC 3-30 C2 CADMIUM TYPE 2 YELLOW PLATING
 AFC 3-30 C1 CADMIUM TYPE 1 PLAIN WHITE PLATING
 AFC 3-30 TDC THERMAL DIFFUSION COATED ASTM A1059

↑ FINISH
 ↑ LENGTH 3.031"
 ↑ BODY SIZE & THREAD .190-32 UNF-3A
 ↑ MANUFACTURER AIRFASCO



ACTUAL SIZE

UNCONTROLLED

CONFORMS TO: NASM3 THRU NASM20
 PART NUMBER: AN3-30A

| | | | | |
|---|--|--|---|--|
| DIMENSIONS ARE IN INCHES AND TOLERANCES ARE AS SHOWN BELOW. DIMENSIONAL TOLERANCES AND SYMBOLS PER ANSI Y14.5M-1982 | PROPRIETARY PARTS SHOWN IN THIS DRAWING ARE THE SUBJECT OF ISSUED UNITED STATES AND FOREIGN PATENTS AND PATENTS PENDING. UNAUTHORIZED REPRODUCTION AND/OR DISTRIBUTION OF THIS DRAWING IS STRICTLY PROHIBITED. | | AIRFASCO.com 2655 HARRISON AVE SW, CANTON, OHIO 44706 USA | |
| | APPROVALS DRAWN C.D. DATE 6/10/13 CHECKED T.W. DATE 6/10/13 ENG APPR B.E. DATE 6/10/13 MGR APPR D.D. DATE 6/10/13 | | PART NUMBER: AN3-30A_AFC3-30C2 SIZE A MATERIAL: 4037 / 8740 OR AS NOTED EST. WEIGHT: .026 / EACH LBS. [12.2 g] | |
| ANGLES ±5° .XX ±.03" .XXX ±.010" .XXXX ±.001" | SCALE: 1.5X DRAWING NUMBER: AN3-30A_AFC3-30C2 | | SHEET 1 OF 1 | |