



MANUFACTURERS

"AFC" LOGO
 .025 MAX
 RAISED OR INDENTED



"X" ALLOY STEEL
 GRADE MARK

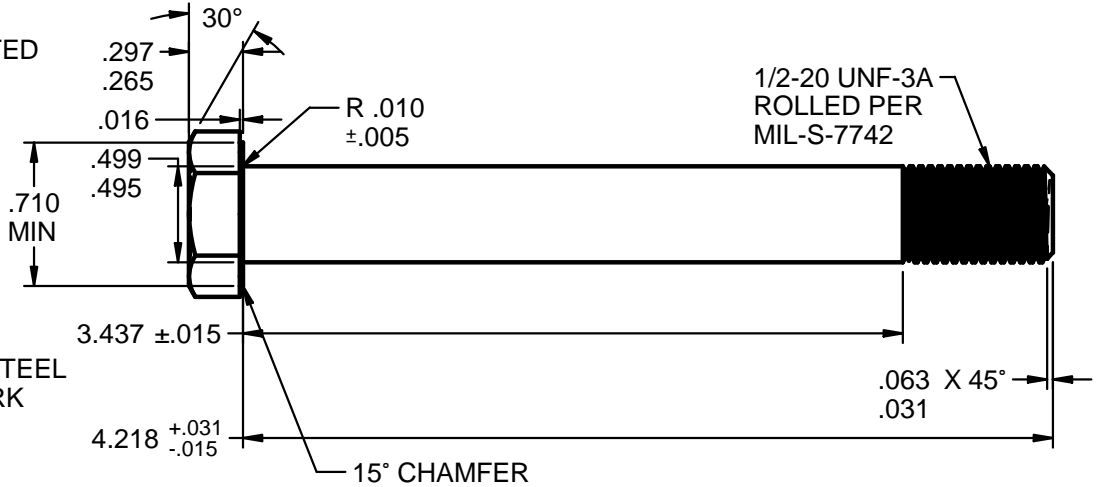

SCALE: 1X

DESIGN NOTES: AN8-41A AIRFRAME BOLT

1. LENGTH 4-7/32" (4.218"), GRIP 3-7/16" (3.437"), THREAD 1/2-20 UNF-3A.
2. PROCUREMENT SPECIFICATION NASM6812.
3. MATERIAL ALLOY STEEL PER PROCUREMENT SPECIFICATION.
 UNS G40370 AMS6300 DFAR EXEMPT
 UNS G87400 AMS6322 DFAR APPLIES
 UNS G41400 AMS6382 DFAR APPLIES
 UNS G41300 AMS-S-6758 DFAR APPLIES
4. HEAT TREAT AMS-2759 HRC 26-32.
5. FINISH CADMIUM PLATED PER AMS-QQ-P-416, TYPE 2 (YELLOW), CLASS 2.
6. THREADS 1/2-20 UNF-3A ROLLED PROCESS PER MIL-S-7742.
7. TENSILE 18,500 LBS. [82,292 N] MIN.
8. YIELD 14,190 LBS. [63,120 N] MIN.
9. SINGLE SHEAR 14,700 LBS. [65,388 N] MIN. SHORT LENGTH N/A.



EXAMPLE PART NUMBER

ACTUAL SIZE

AFC 8-41 C2- CADMIUM TYPE 2 YELLOW PLATING
 AFC 8-41 C1 - CADMIUM TYPE 1 PLAIN WHITE PLATING
 AFC 8-41 TDC- THERMAL DIFFUSION COATED ASTM A1059

↑ FINISH
 ↑ LENGTH 4.218"
 ↑ BODY SIZE & THREAD 0.5-20 UNF-3A
 ↑ MANUFACTURER AIRFASCO

UNCONTROLLED

CONFORMS TO: NASM3 THRU NASM20
 PART NUMBER: AN8-41A

DIMENSIONS ARE IN INCHES AND TOLERANCES ARE AS SHOWN BELOW. DIMENSIONAL TOLERANCES AND SYMBOLS PER ANSI Y14.5M-1982	PROPRIETARY PARTS SHOWN IN THIS DRAWING ARE THE SUBJECT OF ISSUED UNITED STATES AND FOREIGN PATENTS AND PATENTS PENDING. UNAUTHORIZED REPRODUCTION AND/OR DISTRIBUTION OF THIS DRAWING IS STRICTLY PROHIBITED.		AIRFASCO.com 2655 HARRISON AVE SW, CANTON, OHIO 44706 USA	
	APPROVALS DRAWN M.B. DATE 6/5/2014		PART NUMBER: AN8-41A_AFC8-41C2 REV	
ANGLES ±5°	CHECKED T.W. DATE 6/5/2014	SIZE A	MATERIAL: 4037 / 8740 OR AS NOTED	EST. WEIGHT: .263 / EACH LBS. [119.5 g]
.XX ±.03"	ENG APPR B.E. DATE 6/5/2014	SCALE: 1X	DRAWING NUMBER: AN8-41A_AFC8-41C2	SHEET 1 OF 1
.XXX ±.010"	MGR APPR D.D. DATE 6/5/2014			
.XXXX ±.001"				